



LED PAR30 Lamp

FEATURES

- 40° beam angle
- 6 - Cree XRE LEDs
- 80 CRI
- Direct replacement of PAR30 incandescent
- E26 Base
- Voltage: 100~240VAC

BENEFITS

- Immediate power savings - 12W vs. 75W
- Low temperature reduces load on air conditioning
- Easily replaces inefficient incandescent
- Eliminates maintenance and reduces costs
- No warm-up time, instant-on with full light output and stable color
- No environmentally hazardous materials
- No UV or Harmful IR - Will not fade materials and expensive artifacts.
- Shock and vibration resistant

APPLICATIONS

- Retail Displays
- Art Galleries & Museums
- Hotels & Restaurants
- Display Cases
- Accent Lighting
- Office & Residential Lighting

SPECIFICATIONS

Part Number	Description	Watts	Beam Angle	CBCP (cd)	Lumens (lm)	Rated Life* (hours)	CRI	CCT	MOL (in.)	Diameter (in.)
MTBP30-E26-WR	Warm White LED PAR30	12	40°	700	420	25,000	80	2850K	4.93	3.74
MTBP30-E26-NW	Neutral White LED PAR30	12	40°	750	480	25,000	80	4000K	4.93	3.74

*Panoptics PAR30 Life rating is based on 70% Lumen Maintenance.



3 YEAR LIMITED WARRANTY



GREEN LIGHTING PRODUCT



To purchase this product visit www.panopticslighting.com or call 518-406-8065 to speak to a Panoptics sales representative.



LED PAR30 Lamp

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Parameter	Symbol	Rating	Unit
Operating Temperature	Topr.	0 to +40	°C
Storage Temperature	Tstg.	-30 to +60	°C

IES FILES:

Warm White PAR30 LED Light Bulb




Room Size (10ft x 10ft x 10ft)


Neutral White PAR30 LED Light Bulb



Room Size (10ft x 10ft x 10ft)

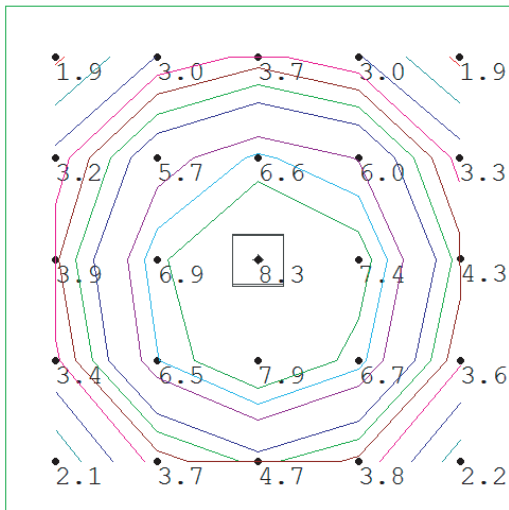

Room Floor Light Distribution
(Unit: Foot Candle)

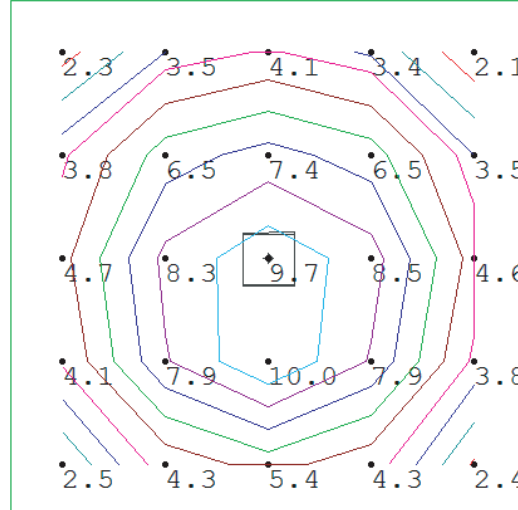

Room Floor Light Distribution
(Unit: Foot Candle)